

Part No. D7086897

Part No. (US): D7086897

## Performance :

Measurement Range	300 - 3000 ppm	40 - 200 ppm
Number of Strokes	1	5
Sampling Time	20 - 30 seconds per stroke	
Relative Standard Deviation	± 15 to ± 25 %	
Colour Change	White → Brown/green	

## Reaction Principle :




## Operating Conditions :

Detector tubes can be used without compensation of reading between 0 °C and 40 °C (32 °F and 104 °F) and up to 80 % RH (40 mg/l at 40 °C [104 °F]).

## Interferences And Cross Sensitivities :

Compound	Interference
All hydrocarbons	Will be detected. Sensitivity of indication may vary.

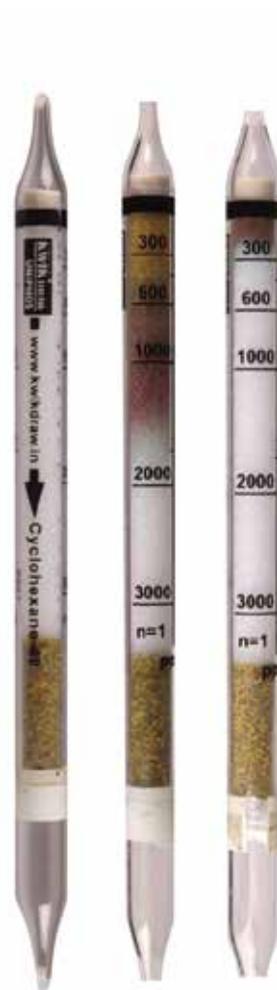

TLV(TWA): 100 ppm

TLV(STEL): N.A.

Flammable Range: 1.3 - 8.3%