

Uniphos Detector Tube Data Sheet

Direct Reading Length of Stain Type

Naphthalene

$C_{10}H_8$

SNP-3

TLV (TWA): 2 ppm

TLV (Ceiling): 4 ppm

Flammable Range: NA %


Specification:

Measurement Range	Extended	Standard	Extended
	Do Not Extend	10 – 100 ppm	Do Not Extend
No. of Pump Strokes		1 (100 mL)	
Volume Correction Factor (VCF)*		1.0	
Sampling Time	2.5 minute per pump stroke (100 mL)		
Color Change	Pale Yellow → Grey		
Shelf Life	1 year		
Storage condition	Below 10°C (50°F)		
Calibration condition	Calibrated at 20°C (68°F) and 10 mg/l		
Reaction Principle	$C_{10}H_8 + Cr^{6+} \rightarrow$ Reaction product		
Relative standard deviation	± 10 – 15 %		

* Multiply the observed reading by the correction factor (VCF) to obtain the true concentration.

Conversion Chart:

Isobutyl Acetate

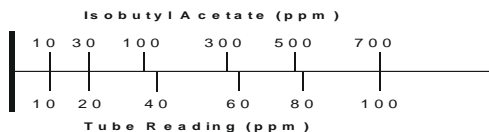

Possible Interferences:

Compound	Concentration (ppm)	Interference	Colour change / Comments
Alcohols (Ethyl alcohol)	200	+	Pale Blue
Esters (Ethyl acetate)	200	+	Pale Grey
Ketones (Acetones)	200	+	Pale Grey
Aromatic Hydrocarbons (Toluene)	200	+	Pale Grey

Correction for Environmental Parameters:

Temperature - Not necessary between 0 - 40°C (32 - 104°F).

Relative humidity - Not necessary between 10 – 90%



Manufactured By: Uniphos Envirotronic Pvt. Ltd. (100% EOU)
Nahuli (PO), Umbergaon (Tal.)
Valsad (Dist), Gujarat, India – 396108

Rev.0920