

Carbon Monoxide-A

KWIK DRAW
UNIPHOS


Part No. D5085759

Part No. (US): 804424

Performance:

| | | |
|-----------------------------|----------------------------|---------------|
| Measurement Range | Mark1:30 ppm | Mark2:150 ppm |
| Number of Strokes | 2 | 2 |
| Sampling Time | 20 - 30 seconds per stroke | |
| Relative Standard Deviation | ± 25 % | |
| Colour Change | White → light brown/green | |

Reaction Principle:




Operating Conditions:

Detector tubes can be used without compensation of reading between 0 °C and 40 °C (32 °F and 104 °F). Up to 90 % RH (46 mg/l at 40 °C [104 °F]) water vapour will not affect the accuracy of indication.

Interferences and Cross Sensitivities:

| Compound | Interference |
|---|--|
| Hydrogen, methane, carbon dioxide. | No interference |
| Ethane up to 5 vol% | No interference |
| Sulphur dioxide, nitric dioxide, nitrogen oxide, ammonia up to 5000 ppm | No interference |
| Aromatic hydrocarbons (e.g. Benzene) up to 1000 ppm | Discolor protective layer to green. |
| Chlorine, hydrogen chloride, hydrogen cyanide, phosgene up to 100 ppm | No interference |
| Propanes and higher saturated hydrocarbons (e.g. butanes & octanes), olefinic hydrocarbons(e.g. ethylene) hydrogen sulphide | Discolor the protective layer from brown to green. |

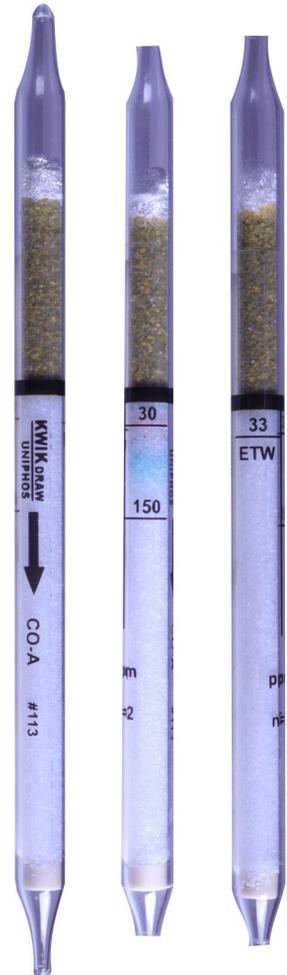

TLV(TWA): 25 ppm

TLV(STEL): N.A.

Flammable Range: 13 - 74%