

Hydrogen Cyanide-2

KWIK DRAW
UNIPHOS

Part No. D5085824

Part No. (US): 803945

Performance:

Measurement Range	5 - 50 ppm	2 - 10 ppm
Number of Strokes	2	10
Sampling Time	20 - 30 seconds per stroke	
Relative Standard Deviation	Up to $\pm 25\%$	
Colour Change	Blue \rightarrow Yellow	

Reaction Principle:




HCl + pH Indicator \rightarrow Yellow reaction product.

Operating Conditions:

Detector tubes can be used without compensation of the reading between 0 °C and 40 °C (32 °F and 104 °F) and between 10% RH [0.5 mg/l at 0 °C (32 °F)] and 90% RH [46 mg/l at 40 °C (104 °F)].

Interferences and Cross Sensitivities:

Compound	Interference
Hydrogen, Methane, Ethane, Propane, Butanes, Carbon Monoxide	No interference
Carbon Dioxide	No interference up to 15 Vol% (n=2) or 3 vol% (n=10)
Higher saturated hydrocarbons, Olefinic hydrocarbons, Aromatic hydrocarbons, Halogenated hydrocarbons, Nitriles, Carbon Disulfide, Acetic acid.	No interference up to 1 Vol% (n=2) or 2000 ppm (n=10).
Ammonia, Sulfur dioxide	No interference up to 1000 ppm (n=2) or 200 ppm (n=10)
Hydrogen sulfide, Hydrogen Chloride	No interference up to 300 ppm (n=2) or 60 ppm (n=10). Hydrogen Sulfide discolors the protective layer from white to brown.
Nitrogen Dioxide	No interference up to 100 ppm (n=2) or 20 ppm (n=10)
Free halogens (Chlorine, Bromine)	Are not indicated but will decrease stain length of Hydrogen Cyanide indication.

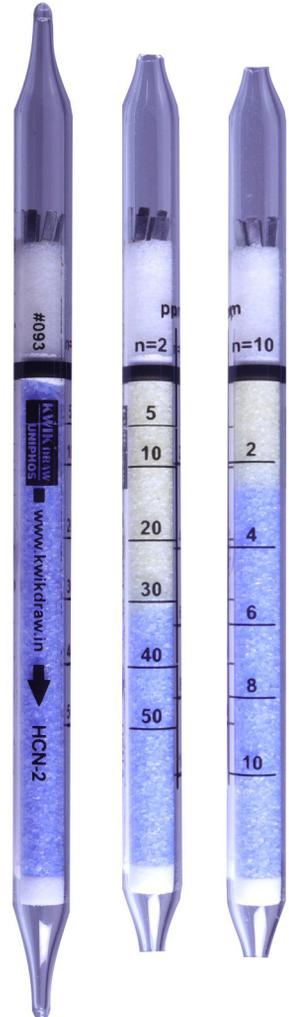

TLV(TWA): N.A.

TLV(STEL): 4.7 ppm

Flammable Range: 6 - 40%