

# H<sub>2</sub>O-1

**KWIK DRAW**  
UNIPHOS


**Part No.:D7086875**

**Part No. (US):D7086875**

## Performance:

Measurement Range	1 - 18 mg/l	20 - 40 mg/l
Sampling Volume	2	1
Sampling Time	20 - 25 seconds per stroke	
Relative Standard Deviation	±15 to 25 %	
Colour Change	Yellow → Greenish blue	

## Reaction Principle:




## Influence of Temperature :

Detector tubes can be used without compensation of the reading between 0 °C and 50 °C (32 °F and 122 °F).

## Interferences and Cross Sensitivities:

Compound	Interference
Methane	No interference from 99 Vol%.

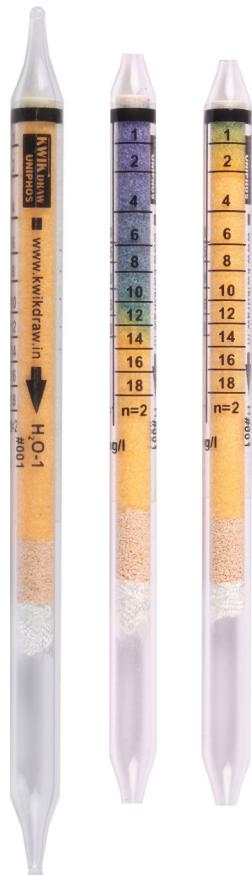

TLV(TWA): N.A.

TLV(STEL): N.A.

Flammable Range: N.A.