


Part No. D7086889

Part No. (US): D7086889

## Performance :

Measurement Range	100 - 1500 ppm
Number of Strokes	5
Sampling Time	20 - 30 seconds per stroke
Relative Standard Deviation	± 15 to ± 25 %
Colour Change	Orange → Green/Brown

## Reaction Principle :




## Operating Conditions :

Detector tubes can be used without compensation of reading between 5 °C and 30 °C (41 °F and 86 °F) and between 10 % RH (0.7 mg/l at 5 °C [41 °F]) and 80 % RH (24 mg/l at 30 °C [86 °F]).

## Interferences And Cross Sensitivities :

Compound	Interference
All hydrocarbons	Will be detected. Sensitivity of indication may vary.

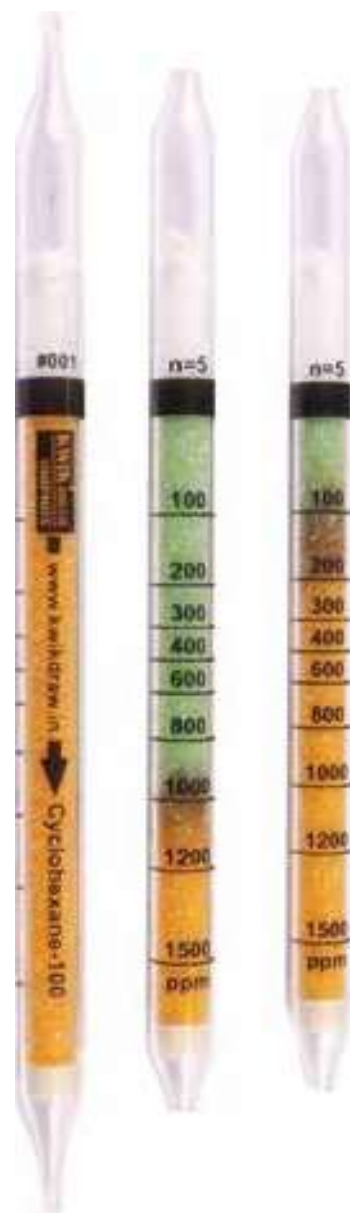

TLV(TWA): 100 ppm

TLV(STEL): N.A

Flammable Range: 1.3 - 8.3%